Cuscinetti a sfera fila unica
ZKLN5090-2Z-INA - ZKLN5090-2Z-INA

https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-sfera/fila-unica/zkln5090-2z-ina

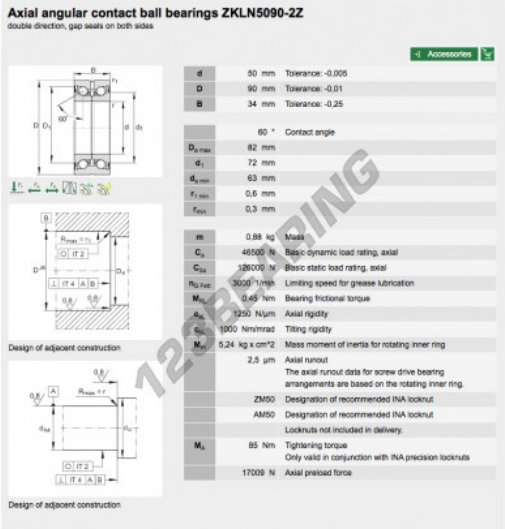

Axial angular contact ball bearings ZKLN5090-2Z

double direction, gap seals on both sides

Accessories

d	50 mm	Tolerance: -0,005
D	90 mm	Tolerance: -0,01
B	34 mm	Tolerance: -0,25
	60 °	Contact angle
$D_{a\,max}$	82 mm	
d_1	72 mm	
$d_{a\,min}$	63 mm	
$r_{1\,min}$	0,6 mm	
r_{min}	0,3 mm	
m	0,88 kg	Mass
C_a	46500 N	Basic dynamic load rating, axial
C_{0a}	126000 N	Basic static load rating, axial
$n_{G\,Fett}$	3000 1/min	Limiting speed for grease lubrication
M_{rr}	0,45 Nm	Bearing frictional torque
c_a	1250 N/µm	Axial rigidity
c_{kip}	1000 Nm/mrad	Tilting rigidity
M_{ra}	5,24 kg x cm^2	Mass moment of inertia for rotating inner ring
	2,5 µm	Axial runout The axial runout data for screw drive bearing arrangements are based on the rotating inner ring.
	ZM50	Designation of recommended INA locknut
	AM50	Designation of recommended INA locknut
		Locknuts not included in delivery.
M_A	85 Nm	Tightening torque Only valid in conjunction with INA precision locknuts
	17009 N	Axial preload force

Design of adjacent construction

Design of adjacent construction

CARATTERISTICHE DEL PRODOTTO

Marchio	INA
N° Ean13	3663952334943
Diametro interno	50 mm
Diametro interno	1.969" inch
Impermeabilizzazione	Schermo su entrambi i lati
Diametro esterno	90 mm
Diametro esterno	3.543" inch
Spessore	34 mm
Spessore	1.339" inch
Peso	918 g
Imballaggio	1

contatto@123cuscinetti.ch
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE