


## Cuscinetti conico 30224-TIMKEN - 30224-TIMKEN

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rulli/conico/30224-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • IsoClass

**IsoClass**

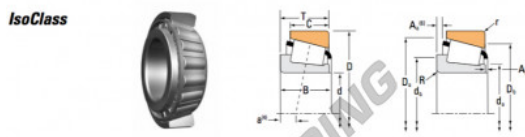

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynami <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynami <sup>(3)</sup> C <sub>2</sub>	Factor <sup>(4)</sup> K	Static C <sub>0</sub>	Assembly Inner/Outer		
mm	mm	mm	N		N		N			
in	in	in	kN		kN		kN			
120.000	215.000	43.500	300000	4.04	120000	79300	1.34	300000	30224	
4.7244	8.4646	1.7126	89100		27000	17200		114000		

Steering Dimensions										Geometry Factors			Bearing Weight	
Drift					Housing					Cage	G <sub>1</sub>	G <sub>2</sub>		C <sub>3</sub>
Width B	Width C	ER Co. a <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(2)</sup>	Backing Shoulder Dia. d <sub>s</sub>	Max Housing Fillet Radius r <sup>(3)</sup>	Backing Shoulder Dia. D <sub>s</sub>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>11</sub> <sup>(4)</sup>	A <sub>12</sub> <sup>(5)</sup>					
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm					
in	in	in	in	in	in	in	in	in	in					
40.000	34.000	0.3	3.6	138.0	140.0	2.5	201.0	196.0	3.7	6.3	252.0	94.0	0.1072	5.26
1.5748	1.3386	0.01	0.12	5.35	5.51	0.10	7.91	7.69	0.14	0.25				13.75

### CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952353982
Diametro interno	120 mm
Diametro interno	4.724" inch
Diametro esterno	215 mm
Diametro esterno	8.465" inch
Spessore	43.5 mm
Spessore	1.713" inch
Peso	6256 g
Imballaggio	1
Standard	Nessuno standard

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE