


## Cuscinetti conico 350A-353D-TIMKEN - 350A-353D-TIMKEN

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rulli/conico/350a-353d-timken>

**TAPERED ROLLER BEARINGS**  
DOUBLE-ROW • TYPE TDO

**TYPE TDO**

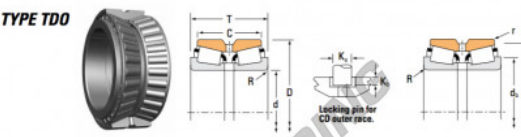

Bearing Dimensions				Load Ratings																																										
Bore d	O.D. D	Width T	Double Outer Ring Width C	Dynamic <sup>(1)</sup>		Static <sup>(2)</sup>		Dynamic <sup>(3)</sup>		Factor <sup>(4)</sup>																																				
mm	mm	mm	mm	C <sub>10</sub>	C	Y <sub>1</sub>	Y <sub>2</sub>	C <sub>90</sub>	C <sub>50</sub>	C <sub>100</sub>	K																																			
40.000	90.119	50.800	44.450	105000	30000	0.31	2.20	3.28	25100	13200	43000																																			
1.5748	3.5480	2.0000	1.7100						5000	2900	9840																																			
<table border="1"> <thead> <tr> <th colspan="2">Part Number</th> <th colspan="4">Dimensions</th> <th colspan="2">Pin</th> <th colspan="3">Geometry Factors</th> <th rowspan="2">Bearing Weight</th> </tr> <tr> <th>Inner</th> <th>Outer</th> <th>Max. Shaft Fillet Radius R<sub>1</sub></th> <th>Backing Shoulder Dia. d<sub>2</sub></th> <th>Max. Housing Fillet Radius r<sub>1</sub></th> <th>Backing Shoulder Dia. D<sub>2</sub></th> <th>K<sub>1</sub></th> <th>K<sub>2</sub></th> <th>G<sub>1</sub></th> <th>G<sub>2</sub></th> <th>C<sub>1</sub></th> </tr> </thead> <tbody> <tr> <td>350A</td> <td>353D</td> <td>0.8 0.03</td> <td>47.5 1.87</td> <td>0.8 0.03</td> <td>82.8 3.23</td> <td>-</td> <td>-</td> <td>30.0</td> <td>12.2</td> <td>0.0792</td> <td>1.53 3.38</td> </tr> </tbody> </table>												Part Number		Dimensions				Pin		Geometry Factors			Bearing Weight	Inner	Outer	Max. Shaft Fillet Radius R <sub>1</sub>	Backing Shoulder Dia. d <sub>2</sub>	Max. Housing Fillet Radius r <sub>1</sub>	Backing Shoulder Dia. D <sub>2</sub>	K <sub>1</sub>	K <sub>2</sub>	G <sub>1</sub>	G <sub>2</sub>	C <sub>1</sub>	350A	353D	0.8 0.03	47.5 1.87	0.8 0.03	82.8 3.23	-	-	30.0	12.2	0.0792	1.53 3.38
Part Number		Dimensions				Pin		Geometry Factors			Bearing Weight																																			
Inner	Outer	Max. Shaft Fillet Radius R <sub>1</sub>	Backing Shoulder Dia. d <sub>2</sub>	Max. Housing Fillet Radius r <sub>1</sub>	Backing Shoulder Dia. D <sub>2</sub>	K <sub>1</sub>	K <sub>2</sub>	G <sub>1</sub>	G <sub>2</sub>	C <sub>1</sub>																																				
350A	353D	0.8 0.03	47.5 1.87	0.8 0.03	82.8 3.23	-	-	30.0	12.2	0.0792	1.53 3.38																																			

### CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952355719
Diametro interno	40 mm
Diametro esterno	90.119 mm
Spessore	50.8 mm
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE