


## Cuscinetti conico 850A-834D-TIMKEN - 850A-834D-TIMKEN

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rulli/conico/850a-834d-timken>

**TAPERED ROLLER BEARINGS**  
DOUBLE-ROW • TYPE TDO

**TYPE TDO**

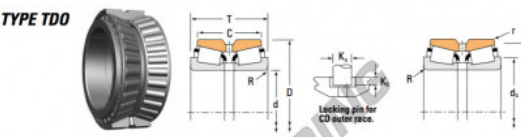

Bearing Dimensions				Load Ratings									
Bore d	O.D. D	Width T	Double Outer Ring Width C	Dynamic <sup>(1)</sup>		Static <sup>(1)</sup>		Dynamic <sup>(1)</sup>		Static <sup>(1)</sup>		Factor <sup>(1)</sup>	
mm	mm	mm	mm	C <sub>10</sub>	C <sub>90</sub>	N <sub>10</sub>	N <sub>90</sub>	C <sub>10</sub>	C <sub>90</sub>	C <sub>50</sub>	N <sub>50</sub>	N <sub>10</sub>	K
89.891	171.450	125.412	106.012	315000	180000	0.30	2.25	3.38	106000	64300	186000	41500	1.95
3.5390	6.7500	4.9375	3.9375	180000	100000				23000	12200	41500		

Part Number		Shaft				Housing				Pin		Geometry Factors			Bearing Weight
Inner	Outer	Max. Shaft Fillet Radius R <sub>f</sub>	Backing Shoulder Dia. d <sub>1</sub>	Max. Housing Fillet Radius r <sub>1</sub>	Backing Shoulder Dia. D <sub>1</sub>	K <sub>1</sub>	K <sub>2</sub>	G <sub>1</sub>	G <sub>2</sub>	C <sub>1</sub>	C <sub>2</sub>				
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	
850A	834D	3.5 0.14	107.8 4.21	8.8 0.35	155.8 6.10	-	-	107.8	34.8	0.0857				12.87 28.04	

### CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952358574
Diametro interno	89.891 mm
Diametro interno	3.539" inch
Diametro esterno	171.45 mm
Diametro esterno	6 3/4" inch
Spessore	125.412 mm
Spessore	4 15/16" inch
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE