


Cuscinetti a rullini RNA69-22-U-IKO - RNA69-22-U-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/rullini/rna69-22-u-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, Without Inner Ring

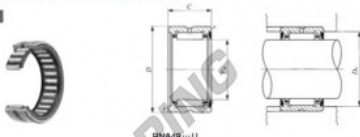

Shaft dia. mm	Identification number				Mass (Ref.) g	Boundary dimensions mm			
	With two seals	With one seal	With two seals	With one seal		F_w	D	C	r_a (1)
28	—	—	—	RNA 69/22U	97.5	28	39	30	0.3
Standard rounding dimension D_s Max. mm									
		Basic dynamic load rating C	Basic static load rating C_0	Allowable rotational speed (reference speed) rpm					
37		33 800	52 000	7 000					

Notes: (1) Minimum allowable value of chamfer dimension r .
(2) Allowable rotational speed applies to grease lubrication.
Remarks: 1. The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952378992
Diametro interno	28 mm
Diametro esterno	39 mm
Spessore	30 mm
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE