Cuscinetti a rullini
RNA49-32-U-IKO - RNA49-32-U-IKO

https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/rullini/rna49-32-u-iko

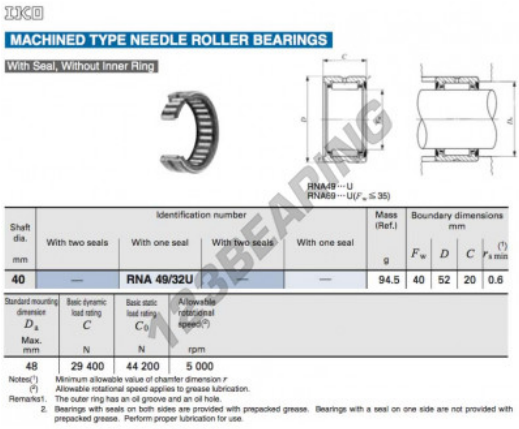

IKO

MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, Without Inner Ring

RNA49···U
RNA69···U(F_w ≦ 35)

Shaft dia. mm	Identification number: With two seals	With one seal	With two seals	With one seal	Mass (Ref.) g	Boundary dimensions mm: F_w	D	C	$r_{s\,min}$ (1)
40	—	RNA 49/32U	—	—	94.5	40	52	20	0.6

Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed (2) rpm
48	29 400	44 200	5 000

Notes(1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to grease lubrication.
Remarks1. The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

123BEARING

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952379142
Diametro interno	40 mm
Diametro esterno	52 mm
Spessore	20 mm
Imballaggio	1

contatto@123cuscinetti.ch
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE