


Cuscinetti a rullini GBRI162820-UU-IKO - GBRI162820-UU-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/rullini/gbri162820-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

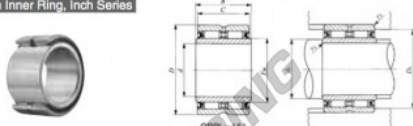

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals	With one seal		d	D	C
25.400 (1)	GBRI 162820 UU		220	25.400 (1)	44.450 (1.75)	31.750 (1.25)

B	F _w	Standard mounting dimensions - mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		d _{min}	d _{max}	D _s Max.					r _{as max} ⁽¹⁾
32.000	31.750 (1.25)	30.5	30.7	39.6	0.6	46 600	83 900	2 500	LRBZ 162020

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to grease lubrication.
Remark: The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952383361
Diametro interno	25.4 mm
Diametro esterno	44.45 mm
Spessore	31.75 mm
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE