


Cuscinetti a rullini GBRI183020-UU-IKO - GBRI183020-UU-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/rullini/gbri183020-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

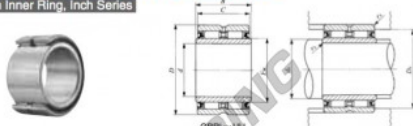

| Shaft dia. mm (inch) | Identification number | | Mass (Ref.) g | Boundary dimensions mm(inch) | | |
|----------------------------|-----------------------|---------------|---------------------|------------------------------|----------------|----------------|
| | With two seals | With one seal | | d | D | C |
| 28.575 (1 1/8) | GBRI 183020 UU | | 240 | 28.575 (1 1/8) | 47.625 (1 7/8) | 31.750 (1 1/4) |

| B | F _w | Standard mounting dimensions - mm | | D _s Max. | r _{as max} ⁽¹⁾ | Basic dynamic load rating C | Basic static load rating C ₀ | Allowable rotational speed ⁽²⁾ rpm | Assembled inner ring |
|--------|----------------|-----------------------------------|------|------------------------|------------------------------------|--------------------------------|--|--|----------------------|
| | | Min. | Max. | | | | | | |
| 32.000 | 34.925 (1 3/8) | 33.5 | 33.9 | 42.8 | 0.6 | 49 500 | 91 800 | 2 500 | LRBZ 182220 |

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | IKO |
| N° Ean13 | 3663952383392 |
| Diametro interno | 28.575 mm |
| Diametro interno | 1 1/8" inch |
| Diametro esterno | 47.625 mm |
| Diametro esterno | 1 7/8" inch |
| Spessore | 31.75 mm |
| Spessore | 1 1/4" inch |
| Imballaggio | 1 |

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE