


## Cuscinetti a rullini GBRI446828-UU-IKO - GBRI446828-UU-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/rullini/gbri446828-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

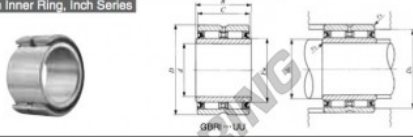

| Shaft dia.<br>mm<br>(inch) | Identification number |                                   | Mass<br>(Ref.)<br>g | Boundary dimensions mm(inch)        |   |  |                      |                        |                                    |
|----------------------------|-----------------------|-----------------------------------|---------------------|-------------------------------------|---|--|----------------------|------------------------|------------------------------------|
|                            | With two seals        | With one seal                     |                     | d                                   | D   | C  |                      |                        |                                    |
| 69.850<br>(2 3/4)          | GBRI 446828 UU        |                                   | 1 490               | 69.850 ± 0.010                      | 107.950 ± 0.010                                 | 44.450 ± 0.010                                   |                      |                        |                                    |
| B                          | F <sub>w</sub>        | Standoff mounting dimensions - mm |                     | Basic dynamic load rating<br>C<br>N | Basic static load rating<br>C <sub>0</sub><br>N | Allowable rotational speed <sup>(2)</sup><br>rpm | Assembled inner ring |                        |                                    |
|                            |                       | Min.                              | Max.                |                                     |   |  |                      | D <sub>s</sub><br>Max. | r <sub>as max</sub> <sup>(1)</sup> |
| 44.700                     | 82.550 ± 0.010        | 77                                | 79                  | 99.9                                | 1.5   | 127 000  | 231 000              | 950                    | LRBZ 445228                        |

Notes: (1) Minimum allowable value of chamfer dimension r.  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

## CARATTERISTICHE DEL PRODOTTO

|                  |               |
|------------------|---------------|
| Marchio          | IKO           |
| N° Ean13         | 3663952383590 |
| Diametro interno | 69.85 mm      |
| Diametro esterno | 107.95 mm     |
| Spessore         | 44.45 mm      |
| Imballaggio      | 1             |

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE