


Cuscinetti a rullini NAXI923-IKO - NAXI923-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/rullini/naxi923-iko>

LINEAR TYPE NEEDLE ROLLER BEARINGS

Needle Bearings with Thrust Ball Bearing **With Inner Ring**
Needle Bearings with Thrust Roller Bearing **With Inner Ring**

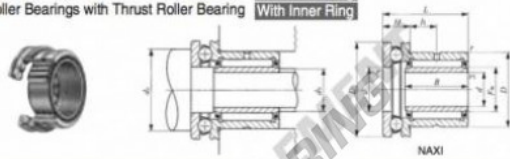

Identification number														
		Mass (Ref.) g	With dust cover	Mass (Ref.) g	Mass (Ref.) g	With dust cover	Mass (Ref.) g							
NAXI	923	49.5	—	—	—	—	—							
Boundary dimensions mm		Bore diameter mm		Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed ⁽¹⁾		Assemble				
B	H	I ₁	(%) N _{min}	(%) F _w	d _a Min.	d _b	Radial	Axial	Radial	Axial	rpm			
16	9	6.5	0.3	0.3	12	12	20	11	9 250	9 670	11 200	11 100	9 000	LRT

Minimum allowable value of chamfer dimension r
Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 70% of this value is allowable in IAX series, and a maximum of 25% of this value is allowable in the NEX series.
The outer ring has an oil groove and an oil hole.
Bearing is not prepacked. Perform proper lubrication.

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952390666
Diametro interno	9 mm
Diametro esterno	21 mm
Spessore	23 mm
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE