


Cuscinetti a rullini NAXI923Z-IKO - NAXI923Z-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/rullini/naxi923z-iko>

LINEAR TYPE NEEDLE ROLLER BEARINGS

Needle Bearings with Thrust Ball Bearing **With Inner Ring**
Needle Bearings with Thrust Roller Bearing **With Inner Ring**

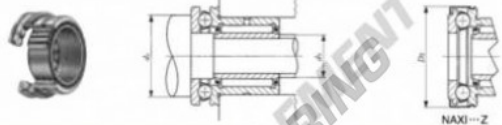

Identification number

Mass (Ref.) g	With dust cover	Mass (Ref.) g	Mass (Ref.) g	With dust cover	Mass (Ref.) g	d
NAXI 923Z	51.5	—	—	—	—	9

Boundary dimensions mm			Bore diameter mm d _a d _b	Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed ⁽¹⁾ rpm	Assemble				
B	H	I ₁		Radial	Axial	Radial	Axial						
16	9	6.5	0.3	0.3	12	20	11	9 250	9 670	11 200	11 100	9 000	LRT

Minimum allowable value of chamfer dimension r
Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 70% of this value is allowable in IAX series, and a maximum of 25% of this value is allowable in the NBSX series.
The outer ring has an oil groove and an oil hole.
Grease is not prepacked. Perform proper lubrication.

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952390673
Diametro interno	9 mm
Diametro esterno	21 mm
Spessore	23 mm
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE