


## Snodi sferici GE GE100GS-IKO - GE100GS-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/ge/ge100gs-iko>

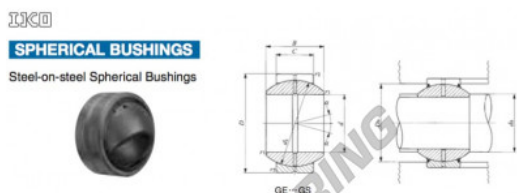

Shaft dia. mm	Identification number		Mass (Ref.) kg	Boundary dimensions mm						Permissible tilting angle degree		
	Without seals	With seals		$d_a$	$D$	$B$	$C$	$d_b$	$r_1$ (1)	$r_2$ (1)	$\alpha$	$\alpha_1$
100	GE 100GS		6.15	100	160	85	55	140	1	1	14	12
Mounting dimensions mm		Dynamic load capacity $C_d$		Static load capacity $C_s$								
$d_a$	$D_a$											
Min.	Max.(2)	Max.	Min.	N		N						
105.5	111	154.5	138	755 000		4 530 000						

Notes (1) Minimum allowable value of chamfer dimensions  $r_1$  and  $r_2$ .  
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of  $d_a$ .  
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.  
2. Not provided with prepacked grease. Perform proper lubrication for use.

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952392509
Diametro interno	100 mm
Diametro esterno	160 mm
Spessore	85 mm
Tipo	GE
Lubrificazione	senza
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE