


## Snodi sferici GE SBB56-IKO - SBB56-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/ge/sbb56-iko>

**IKO**  
**SPHERICAL BUSHINGS**  
Steel-on-steel Spherical Bushings Inch Series

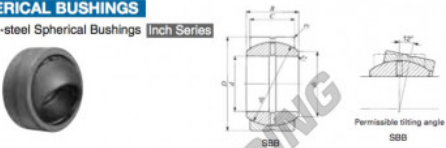

Shaft dia. mm (inch)	Identification number		Mass (flat) kg	Boundary dimensions mm(inch)			
	Without seal	With seals		d	D	B	C
<b>88.900</b> (3 1/2)	<b>SBB 56</b>		<b>4.83</b>	<b>88.900 (3 1/2)</b>	<b>139.700 (5 1/2)</b>	<b>77.77 (3.062)</b>	<b>66.68 (2.625)</b>
Radial internal clearance mm Min./Max.	Mounting dimensions mm		Dynamic load capacity C <sub>d</sub> N	Static load capacity C <sub>s</sub> N			
	d <sub>k</sub>	d <sub>1</sub> r <sub>1</sub> max. r <sub>2</sub> max.		r <sub>1</sub> r <sub>2</sub> max.			
128(5.039)	0.13 / 0.23		101.6	0.6	0.8	837 000	5 020 000

Notes: (1) Minimum allowable value of chamfer dimensions r<sub>1</sub> and r<sub>2</sub>.  
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d<sub>k</sub>.  
Remark 1: The inner ring and the outer ring have an oil groove and two oil holes, respectively.  
2: Not provided with prepacked grease. Perform proper lubrication for use.

### CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952392967
Diametro interno	88.9 mm
Diametro esterno	139.7 mm
Spessore	77.77 mm
Tipo	GE
Lubrificazione	senza
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE