


Rotelle con perno CFE10-1-VR-IKO - CFE10-1-VR-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-sfera/rotelle-perno/cfe10-1-vr-iko>

IKO
CAM FOLLOWERS
Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

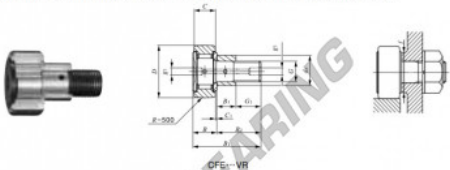

| Outside diameter of eccentric roller mm | Identification number | | | | Mass (Ref.) | | | |
|--|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------|----|----|----------------|
| | Shield type | | Sealed type | | g | D | C | d _e |
| | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring | | | | |
| 13 | CFE 10-1 VR | | | | 66 | 26 | 12 | 13 |

| Boundary dimensions mm | | | | | | | | | | | | | | |
|------------------------|----------------|------------------|-----------------------|----------------|----------------|----------------|----------------|-----------------------|-------------------|---------------------------------------|---------------------------------|-------------------------------------|---|------------------------------------|
| G | B ₃ | B _{max} | B ₂ max | B ₂ | C ₁ | g ₁ | G ₁ | r ₁ min | Eccentricity E | Mounting dimension f Min. mm | Maximum operating torque N·m | Basic dynamic load rating C N | Basic static load rating C ₀ N | Maximum allowable static load N |
| M10 × 1.25 | 10.5 | 13.2 | 36.2 | 23 | 0.6 | *4 | 12.5 | 0.3 | 0.4 | 16 | 13.8 | 9 570 | 14 500 | 8 650 |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | IKO |
| N° Ean13 | 3616060460974 |
| Diametro interno | 13 mm |
| Diametro esterno | 26 mm |
| Spessore | 12 mm |
| Peso | 66 g |
| Imballaggio | 1 |

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE