


Rotelle con perno CR14-R-IKO - CR14-R-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-sfera/rotelle-perno/cr14-r-iko>

IKO
CAM FOLLOWERS
Inch Series Cam Followers With Cage/With Screwdriver Slot

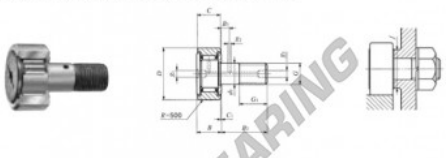

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d ₁	G UNF	G ₁
	Shield type		Sealed type							
	With covered outer ring	With cylindrical outer ring	With covered outer ring	With cylindrical outer ring						
9.525 ($\frac{3}{8}$)	CR 14 R				46	22.225 ($\frac{7}{8}$)	12.700 ($\frac{1}{2}$)	9.525 ($\frac{3}{8}$)	UNF-24	9.525 ($\frac{3}{8}$)
Boundary dimensions mm(inch)					Mounting dimension f mm(inch)	Maximum tightening torque C N·m	Basic dynamic load rating C ₀ N	Basic static load rating C ₀ N		
B max	B ₂	B ₃	C ₁	E ₁					E ₂	F
14.2 (0.56)	22.225 ($\frac{7}{8}$)	6.350 ($\frac{1}{4}$)	0.794 ($\frac{1}{16}$)	4.762 ($\frac{3}{16}$)	2.381 ($\frac{3}{32}$)	0.794 ($\frac{1}{16}$)	15.081 ($\frac{5}{8}$)	10.8	4.790	9.810

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060462879
Diametro interno	9.525 mm
Diametro esterno	22.225 mm
Spessore	12.7 mm
Peso	46 g
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE