


## Cuscinetti assiali a rullini AZ11014525-IKO - AZ11014525-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/assiali-rullini/az11014525-iko>

**IKO**  
**THRUST BEARINGS**  
Thrust Roller Bearings

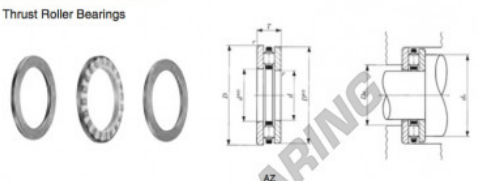

| Shaft dia. mm | Identification number |               |                       |               |            |            |               |
|---------------|-----------------------|---------------|-----------------------|---------------|------------|------------|---------------|
|               | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring | Outer ring | Mass (Ref.) g |
| 110           | AZ 11014525           | 1 350         | AZK 11014511          | 590           | WS 110145  | GS 110145  | 380           |

| Boundary dimensions mm |     |    |                |                |                |   |                    |                |                | Standard mounting dimensions mm |                     | Basic dynamic load rating C | Basic static load rating C <sub>0</sub> | Allowable rotational speed <sup>(2)</sup> |
|------------------------|-----|----|----------------|----------------|----------------|---|--------------------|----------------|----------------|---------------------------------|---------------------|-----------------------------|---|---|
| d                      | D   | T  | d <sub>c</sub> | D <sub>c</sub> | D <sub>w</sub> | B | r <sub>s</sub> (1) | C <sub>1</sub> | C <sub>2</sub> | d <sub>s</sub> Min.             | D <sub>s</sub> Max. | N                           | N                                       | rpm                                       |
| 110                    | 145 | 25 | 110.1          | 144.5          | 11             | 7 | 1                  | 118            | 140            | 139                             | 118                 | 142 000                     | 569 000                                 | 2 500                                     |

Notes: (1) Minimum allowable value of chamfer dimension r.  
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

### CARATTERISTICHE DEL PRODOTTO

|                  |               |
|------------------|---------------|
| Marchio          | IKO           |
| N° Ean13         | 3616060466433 |
| Diametro interno | 110 mm        |
| Diametro esterno | 145 mm        |
| Spessore         | 25 mm         |
| Peso             | 1350 g        |
| Imballaggio      | 1             |

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE