


## Cuscinetti assiali a rullini AZK14024015-IKO - AZK14024015-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/assiali-rullini/azk14024015-iko>

**IKO**  
**THRUST BEARINGS**  
Thrust Roller Bearings

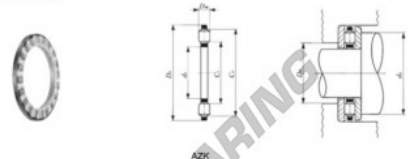

| Shaft dia. mm | Identification number |               |                       |               |            |            |               |
|---------------|-----------------------|---------------|-----------------------|---------------|------------|------------|---------------|
|               | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring | Outer ring | Mass (Ref.) g |
| 140           | AZ 14024039           | 8 680         | AZK 14024015          | 3 100         | WS 140240  | GS 140240  | 2 790         |

| Boundary dimensions mm |     |    |                |                |                |    |                    |                |                | Standard mounting dimensions mm |                     | Basic dynamic load rating C | Basic static load rating C <sub>0</sub> | Allowable rotational speed <sup>(*)</sup> |
|------------------------|-----|----|----------------|----------------|----------------|----|--------------------|----------------|----------------|---------------------------------|---------------------|-----------------------------|---|---|
| d                      | D   | T  | d <sub>c</sub> | D <sub>c</sub> | D <sub>w</sub> | B  | r <sub>s</sub> (1) | C <sub>1</sub> | C <sub>2</sub> | d <sub>s</sub> Min.             | D <sub>s</sub> Max. | N                           | N                                       | rpm                                       |
| 140                    | 240 | 39 | 140.1          | 239            | 15             | 12 | 2.1                | 161            | 227            | 226                             | 162                 | 435 000                     | 2 180 000                               | 1 600                                     |

Notes: (\*) Minimum allowable value of chamfer dimension r  
(1) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

### CARATTERISTICHE DEL PRODOTTO

|                  |               |
|------------------|---------------|
| Marchio          | IKO           |
| N° Ean13         | 3616060466709 |
| Diametro interno | 140 mm        |
| Diametro interno | 5.512" inch   |
| Diametro esterno | 240 mm        |
| Diametro esterno | 9.449" inch   |
| Spessore         | 15 mm         |
| Spessore         | 0.591" inch   |
| Peso             | 3100 g        |
| Imballaggio      | 1             |

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE