


## Teste a snodo SI SIL40-T-K-DURBAL - SIL40-T-K-DURBAL

<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/si/sil40-t-k-durbal>

### SIL40-T-K

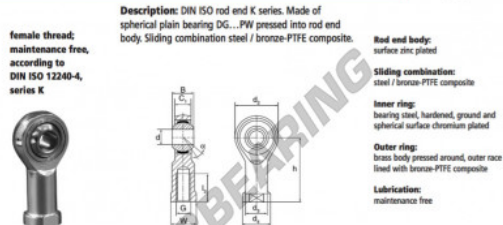

female thread:  
maintenance free,  
according to  
DIN ISO 12240-4,  
series K

Description: DIN ISO rod end K series. Made of spherical plain bearing DG...PW pressed into rod end body. Sliding combination steel / bronze-PTFE composite.

Rod end body:  
surface zinc plated

Sliding combination:  
steel / bronze-PTFE composite

Inner ring:  
bearing steel, hardened, ground and  
spherical surface chromium plated

Outer ring:  
brass body pressed around, outer race  
lined with bronze-PTFE composite

Lubrication:  
maintenance free

order number	right hand thread	left hand thread	d	G	B	C <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>
SIL 40 T/K			40	M 42 x 2	49	33,00	91	53,0	65

type	measurement [mm]				load rating C <sub>5</sub> [kN]	weight [kg]
	l <sub>3</sub> min	W	h	d <sub>1</sub>		
SI / SIL 40 T/K	60	55	142	17		2,400

## CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952489810
Diametro interno	40 mm
Diametro esterno	91 mm
Spessore	49 mm
Tipo	SI
Peso	2400 g
Il filo	Filetto sinistro
Lubrificazione	senza
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE