

## Teste a snodo SA SSA28-T-K-DURBAL - SSA28-T-K-DURBAL

<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/sa/ssa28-t-k-durbal>

### SSA28-T-K



**male thread:** maintenance free, according to DIN ISO 12240-4, series K, in stainless steel

**Description:** DIN ISO rod end K series. Made of spherical plain bearing DG...PW pressed into rod end body. Sliding combination steel / bronze-PTFE composite.


**Red end body:** stainless steel

**Sliding combination:** steel / bronze-PTFE composite

**Inner ring:** stainless steel, hardened and ground

**Outer ring:** stainless steel body pressed around, outer race lined with bronze-PTFE composite

**Lubrication:** maintenance free

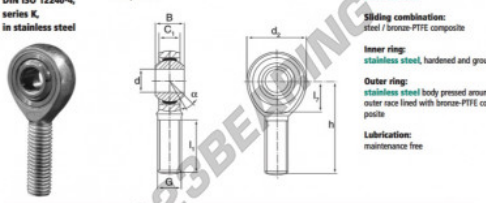

order number	right hand thread	left hand thread	measurement [mm]			
SSA 28 T/K	28		G	B	C <sub>1</sub>	d <sub>2</sub>
			M 27 x 2	35	24,00	66

type	measurement [mm]			alpha [°]	load rating C <sub>0</sub> [kN]	weight [kg]
	l <sub>1</sub> min	l <sub>2</sub> min	h			
SSA / SSAL 28 T/K	62	33	103	15	107,0	0,800

## CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952490991
Diametro interno	28 mm
Diametro interno	1.102" inch
Diametro esterno	66 mm
Diametro esterno	2.598" inch
Spessore	35 mm
Spessore	1.378" inch
Tipo	SA
Peso	800 g
Il filo	Filetto destro
Lubrificazione	senza
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE