

## Teste a snodo SI SIZPL6-S-DURBAL - SIZPL6-S-DURBAL


<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/si/sizpl6-s-durbal>

### SIZPL6-S



**Description:** DIN ISO rod end K series. Dimensions in inch. Sliding combination steel / heavy duty bronze. With grease nipple.

female thread:  
lubrication  
required,  
similar to  
DIN ISO 12240-4,  
series K,  
measurement in  
inches

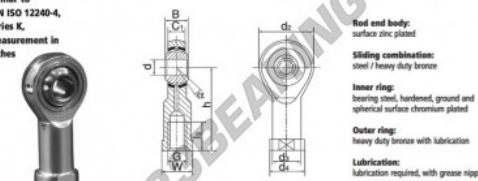

**Sliding combination:**  
steel / heavy duty bronze

**inner ring:**  
bearing steel, hardened, ground and  
spherical surface chromium plated

**Outer ring:**  
heavy duty bronze with lubrication

**Lubrication:**  
lubrication required, with grease nipple

order number		measurement [mm]						
right hand thread	left hand thread	d	G	B	C <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>
SIZPL 6 S		6,35	1/4 - 28	9,53	7,14	19,05	9,15	11,91

type	inches	l <sub>1</sub> min	W	h	α [°]	load rating C <sub>0</sub> [kN]	weight [kg]
SIZP / SIZPL 6 S	1 / 4 "	19,05	9,53	33,32	13	7,7	0,025

## CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952495651
Diametro interno	6.35 mm
Diametro esterno	19.05 mm
Spessore	9.53 mm
Tipo	SI
Peso	25 g
Il filo	Filetto sinistro
Lubrificazione	senza
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE