Teste a snodo SA
SAZP6-S-DURBAL - SAZP6-S-DURBAL

https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/sa/sazp6-s-durbal

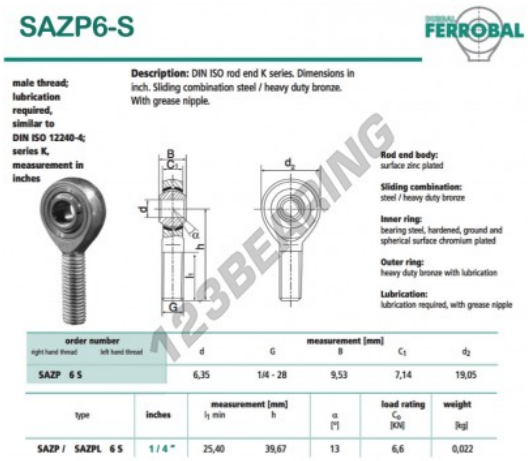

SAZP6-S

FERROBAL

male thread; lubrication required, similar to DIN ISO 12240-4; series K, measurement in inches

Description: DIN ISO rod end K series. Dimensions in inch. Sliding combination steel / heavy duty bronze. With grease nipple.

Rod end body: surface zinc plated

Sliding combination: steel / heavy duty bronze

Inner ring: bearing steel, hardened, ground and spherical surface chromium plated

Outer ring: heavy duty bronze with lubrication

Lubrication: lubrication required, with grease nipple

order number (right hand thread / left hand thread)	d	G	B	C_1	d_2
SAZP 6 S	6,35	1/4 - 28	9,53	7,14	19,05

type	inches	l_1 min	h	α [°]	load rating C_0 [KN]	weight [kg]
SAZP / SAZPL 6 S	1 / 4 "	25,40	39,67	13	6,6	0,022

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952496030
Diametro interno	6.35 mm
Diametro esterno	19.05 mm
Spessore	9.53 mm
Tipo	SA
Peso	22 g
Il filo	Filetto destro
Lubrificazione	senza
Imballaggio	1

contatto@123cuscinetti.ch
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE