


Teste a snodo SI SIZJ15-DURBAL - SIZJ15-DURBAL

<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/si/sizj15-durbal>

SIZJ15

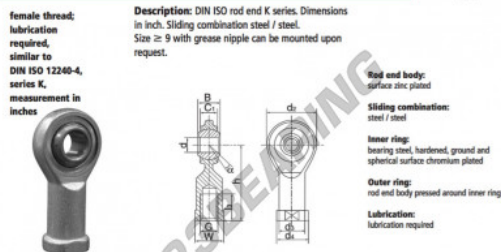

female thread:
lubrication
required,
similar to
DIN ISO 12240-4,
series K,
measurement in
inches

Description: DIN ISO rod end K series. Dimensions
in inch. Sliding combination steel / steel.
Size: 9 with grease nipple can be mounted upon
request.

Rod end body:
surface zinc plated
Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and
spherical surface chromium plated
Outer ring:
rod end body pressed around inner ring
Lubrication:
lubrication required

order number	d	B	C ₁	d ₂	G	d ₃	d ₄
SIZJ 15	15,88	19,05	12,29	38,10	5/8 - 18	21,84	25,40

type	inches	h ₁ min	W	h	α [°]	load rating C ₀ (kN)	weight (kg)
SIZJ / SIZJL 15	5 / 8"	31,75	22,23	63,50	13,0	29,0	0,195

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952496900
Diametro interno	15.88 mm
Diametro esterno	38.1 mm
Spessore	19.05 mm
Tipo	SI
Peso	195 g
Il filo	Filetto destro
Lubrificazione	senza
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE