Teste a snodo SI
SIL60-ES-2RS-DURBAL - SIL60-ES-2RS-DURBAL

https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/si/sil60-es-2rs-durbal

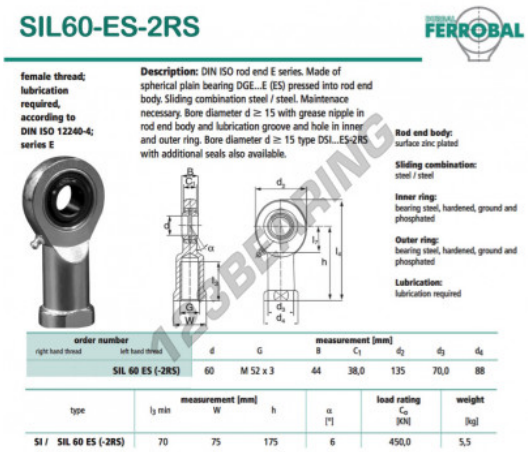

SIL60-ES-2RS

FERROBAL

female thread; lubrication required, according to DIN ISO 12240-4; series E

Description: DIN ISO rod end E series. Made of spherical plain bearing DGE...E (ES) pressed into rod end body. Sliding combination steel / steel. Maintenace necessary. Bore diameter d ≥ 15 with grease nipple in rod end body and lubrication groove and hole in inner and outer ring. Bore diameter d ≥ 15 type DSI...ES-2RS with additional seals also available.

Rod end body: surface zinc plated

Sliding combination: steel / steel

Inner ring: bearing steel, hardened, ground and phosphated

Outer ring: bearing steel, hardened, ground and phosphated

Lubrication: lubrication required

order number (right hand thread / left hand thread)	d	G	measurement [mm] B	C_1	d_2	d_3	d_4
SIL 60 ES (-2RS)	60	M 52 x 3	44	38,0	135	70,0	88

type	measurement [mm] l_3 min	W	h	α [°]	load rating C_0 [KN]	weight [kg]
SI / SIL 60 ES (-2RS)	70	75	175	6	450,0	5,5

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952497624
Diametro interno	60 mm
Diametro esterno	135 mm
Spessore	44 mm
Tipo	SI
Peso	5500 g
Il filo	Filetto sinistro
Lubrificazione	con
Imballaggio	1

contatto@123cuscinetti.ch
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE