

## Teste a snodo TAPR GIHN-KL-100LO-DURBAL - GIHN-KL-100LO-DURBAL


<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/tapr/gihn-kl-100lo-durbal>

### GIHN-KL-100LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

\* without grease nipple

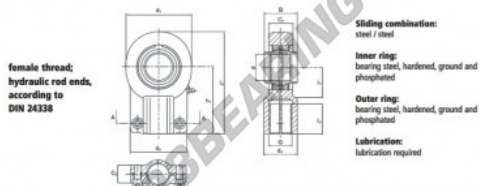

female thread:  
hydraulic rod ends,  
according to  
DIN 24338

Sliding combination:  
steel / steel  
Inner ring:  
bearing steel, hardened, ground and  
phosphated  
Outer ring:  
bearing steel, hardened, ground and  
phosphated  
Lubrication:  
lubrication required

order number	d	d <sub>1</sub>	measurement [mm]	G	d <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>
right hand thread								
left hand thread								
<b>GIHN-KL 100 LO</b>	100	210	M 80 x 3	110,0	178	100	84	62

type	l <sub>1</sub> min	measurement [mm]	l <sub>2</sub>	l <sub>3</sub>	load rating	weight
					C <sub>0</sub> [kN]	[kg]
GIHN-K / GIHN-KL 100 LO	96	210	322,0	98	1060,0	28,00

## CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952500485
Diametro interno	100 mm
Diametro esterno	210 mm
Spessore	84 mm
Tipo	TAPR
Peso	28000 g
Il filo	Filetto sinistro
Lubrificazione	con
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE