


## Teste a snodo SA BRM10-00-501-DURBAL - BRM10-00-501-DURBAL

<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/sa/brm10-00-501-durbal>

### BRM10-00-501

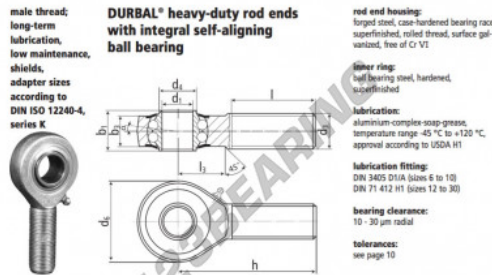

male thread:  
long-term  
lubrication,  
low maintenance,  
shields,  
adapter sizes  
according to  
DIN ISO 12240-4,  
series K

**DURBAL® heavy-duty rod ends  
with integral self-aligning  
ball bearing**

rod end housing:  
forged steel, case-hardened bearing race,  
superfinished, rolled thread, surface gal-  
vanized, free of Cr-VI

inner ring:  
ball bearing steel, hardened,  
superfinished

lubrication:  
aluminum-complex-soap-grease,  
temperature range -45 °C to +120 °C,  
approval according to USDA H1

lubrication fitting:  
DIN 2455 D11A (sizes 6 to 10)  
DIN 21 412 H1 (sizes 12 to 30)

bearing clearance:  
10 - 30 µm radial  
tolerances:  
see page 10

order number		measurements [mm]								
Type	right-hand thread	M1-hand thread	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	b <sub>1</sub>	b <sub>2</sub>	h
BRM 10 -00 -501			10	M 10		12,0	28	14	10,5	48
measurements [mm]		weight	calculation-factors		rotational speed limit	basic load rating				
Type	l	l <sub>3</sub>	α [°]	Y	v <sub>0</sub>	C	C <sub>10</sub>	C <sub>50</sub>	stat.	dyn.
BRM 10	29	15	8,0	0,060	1,90	1,81	1225	4450	1450	

## CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952506968
Diametro interno	10 mm
Diametro esterno	28 mm
Spessore	14 mm
Tipo	SA
Peso	60 g
Il filo	Filetto destro
Lubrificazione	con
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE