


Teste a snodo SA BRM16-00-501-DURBAL - BRM16-00-501-DURBAL

<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/sa/brm16-00-501-durbal>

BRM16-00-501

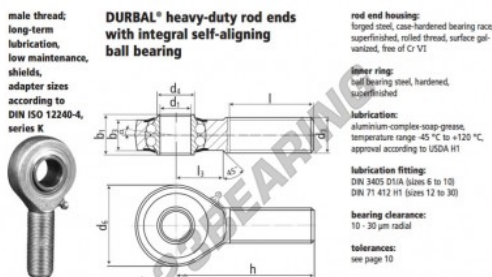

male thread:
long-term
lubrication,
low maintenance,
shields,
adapter sizes
according to
DIN ISO 12240-4,
series K

**DURBAL® heavy-duty rod ends
with integral self-aligning
ball bearing**

rod end housing:
forged steel, case-hardened bearing race,
superfinished, rolled thread, surface gal-
vanized, free of Cr-VI

inner ring:
self-bearing steel, hardened,
superfinished

lubrication:
aluminum-complex-soap-grease,
temperature range -45 °C to +120 °C,
approval according to USDA H1

lubrication fitting:
DIN 2455 D1/A (sizes 6 to 10)
DIN 21 412 H1 (sizes 12 to 30)

bearing clearance:
10 - 30 µm radial

tolerances:
see page 10

order number		measurements [mm]							
Type	right-hand thread	M 16	M 16	M 16	M 16	M 16	M 16	M 16	
BRM 16 -00 -501		16	M 16	19,0	42	21	15,0	66	
measurements [mm]		weight	calculation-factors	rotational speed limit	basic load rating				
Type	l	l ₃	α [°]	Y	v ₀	C	d _{ym}	stat. C ₀	
BRM 16	40	22	8,0	0,190	2,24	2,35	975	6250	2350

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952507033
Diametro interno	16 mm
Diametro esterno	42 mm
Spessore	21 mm
Tipo	SA
Peso	190 g
Il filo	Filetto destro
Lubrificazione	con
Imballaggio	-
Standard	Nessuno standard

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE