


Snodi sferici GE

BRTM1-2-00-501-DURBAL - BRTM1-2-00-501-DURBAL

<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/ge/brtm1-2-00-501-durbal>

BRTM1/2-00-501

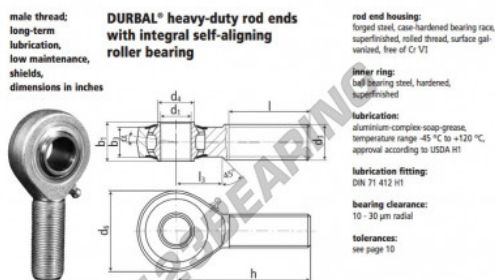

male thread:
long-term
lubrication,
low maintenance,
shields,
dimensions in inches

**DURBAL® heavy-duty rod ends
with integral self-aligning
roller bearing**

rod end housing:
forged steel, case-hardened bearing race,
superfinished, rolled thread, surface gal-
vanized, free of Cr-VI

inner ring:
ball bearing steel, hardened,
superfinished

lubrication:
aluminum-complex soap grease,
temperature range -45 °C to +120 °C,
approval according to USDA H1

lubrication fitting:
DIN 71 412 H1

bearing clearance:
10 - 30 µm radial

tolerances:
see page 10

order number		measurements [inches]					
type	right hand thread left hand thread	d ₁	d ₂ class 2	d ₄	d ₅	b ₁	b ₂
BRTM 1/2 -00	-501	.500	.5000-20 UNF	.574	1.311	.624	.472
measurements [inches]		weight		rotational speed limit		basic load rating	
type	h	l	α [°]	[kg]	rpm [min ⁻¹]	C [N]	C ₀ [N]
BRTM 1/2	2.460	1.496	.846	7.5	0,109	1125	10250 6600

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3616060468291
Diametro interno	12.7 mm
Diametro esterno	33.3 mm
Spessore	15.85 mm
Tipo	GE
Peso	109 g
Il filo	Filetto destro
Lubrificazione	con
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE