


Accessorio de supporti N6906-NICE - N6906-NICE

<https://www.123cuscineti.ch/cuscineti-supporti/supporti/accessorio/n6906-nice>

6900 Series™ Semi-Ground Radial Bearings, Extended Inner with Flanged Housing **NICE**

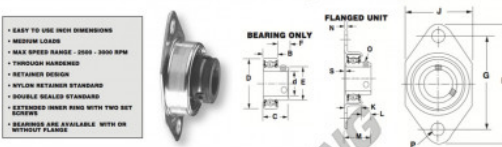

- EASY TO USE DIMENSIONS
- MEDIUM LOADS
- MAX SPEED RANGE: 2000 - 3000 RPM
- THROUGH HARDENED
- RETAINED DESIGN
- NYLON RETAINER STANDARD
- DOUBLE SEALED STANDARD
- EXTENDED INNER RING WITH TWO SET SCREWS
- BEARINGS ARE AVAILABLE WITH OR WITHOUT FLANGES

BEARING		PRINCIPLE DIMENSIONS							
FLANGED UNIT	BEARING ONLY	Bore d (in) (mm)	O.D. D (in) (mm)	Width B (in) (mm)	Width C (in) (mm)	E (in) (mm)	F (in) (mm)	G (in) (mm) Bolt Centers	H (in) (mm)
	SUFFIX	+0.005 +0.13 -0.000 -0.00	+0.000 +0.00 -0.005 -0.01	+0.00 +0.00 -0.00 -0.15	0.688 17.46	0.555 14.10	0.375 9.53	1.875 47.63	2.500 63.50
N6906™	B	0.375 9.53	0.9063 23.026	0.313 7.94	0.688 17.46	0.555 14.10	0.375 9.53	1.875 47.63	2.500 63.50

PRINCIPLE DIMENSIONS							BASIC LOAD RATINGS		WEIGHT	
J (in) (mm)	K (in) (mm)	L (in) (mm)	M (in) (mm)	N (in) (mm)	O 2-Set Screws	P (in) (mm) Hole Dia.	S (in) (mm)	C (lbs) (N)	C ₀ (lbs) (N)	W (lbs) (kg)
1.125 28.58	0.344 8.73	0.344 8.73	0.688 17.46	0.035 0.89	8-32	0.3125 7.94	0.020 0.50	580 2581	300 1335	0.07 0.03

① When Ordering specify whether assembly or bearing only is required. Bearings are stamped with designation and suffix B, for example 6906™B. Housings no longer carry part numbers.
② Tolerance for 6912 and larger is +.0000/-0.0006 (+000/-016) ③ Weights given are for greased and sealed version with flange mount.

CARATTERISTICHE DEL PRODOTTO

Marchio	NICE
N° Ean13	3663952564784
Diametro interno	9.53 mm
Diametro esterno	23.02 mm
Spessore	7.94 mm
Imballaggio	1

contatto@123cuscineti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE