


## Gusci a rullini TLA4020-UU-IKO - TLA4020-UU-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/tla4020-uu-iko>

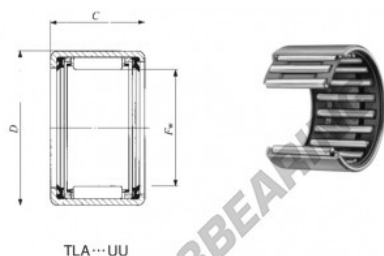

TLA...UU

Shell Type needle roller with seals

Boundary dimension		mm		Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed(1)
F		H		H <sub>1</sub>		H <sub>2</sub>		C	C <sub>10</sub>	C <sub>12</sub>	rpm	
x	D	C	Min.	Max.	Min.	Max.	Min.	Max.	N	N	rpm	
93	54	20	52,000	49,854	57,591	57,591	57,591	29800	64100	64100	3500	

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060601087
Diametro interno	40 mm
Diametro interno	1.575" inch
Diametro esterno	47 mm
Diametro esterno	1.85" inch
Spessore	20 mm
Spessore	0.787" inch
Velocità limite	4500 rpm
Carico dinamico	16.7 kN
Carico statico	33.7 kN
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE