


## Gusci a rullini BA1614-Z-IKO - BA1614-Z-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba1614-z-iko>

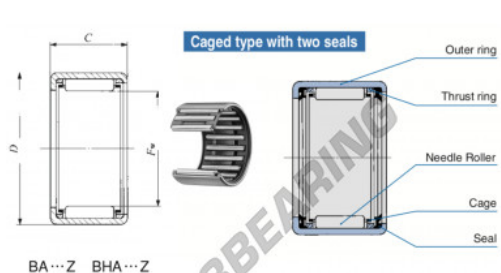

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic	Basic static	Allowable	Assembled			
$F_w$	$D$	$C$	$d_2$	$s_6$	Shaft dia.	Housing bore dia.	load rating	load rating	rotational	inner ring			
			Min.	Max.	Min.	Max.	N	N	rpm				
25.400	1.31750	11.41	22.22	875	2.8	25.400	25.387	31.764	48888	16900	30400	15000	RB 1214

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060601193
Diametro interno	25.4 mm
Diametro esterno	31.75 mm
Spessore	22.22 mm
Velocità limite	15000 rpm
Carico dinamico	16.9 kN
Carico statico	30.4 kN
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE