


## Gusci a rullini BA1916-Z-IKO - BA1916-Z-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba1916-z-iko>

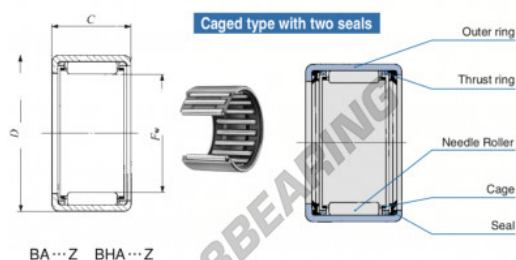

Boundary dimensions mm(inch)				Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring
$F_w$	$D$	$C$	$t_2$	Shaft dia. $d_1$	Housing bore dia. $\varnothing T$		$C$	$C_0$	rpm		
				Max.	Max.	Min.	Max.	Min.	N	N	
30.162 (1.1870)	38.100 (1.5000)	25.400 (1.0000)	2.8	30.162	30.146	30.178	38.114	38.089	25800	45300	12000

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060601308
Diametro interno	30.162 mm
Diametro interno	1 3/16" inch
Diametro esterno	38.1 mm
Diametro esterno	1 1/2" inch
Spessore	25.4 mm
Spessore	1" inch
Velocità limite	12000 rpm
Carico dinamico	25.8 kN
Carico statico	45.3 kN
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE