


Gusci a rullini BA328-Z-IKO - BA328-Z-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba328-z-iko>

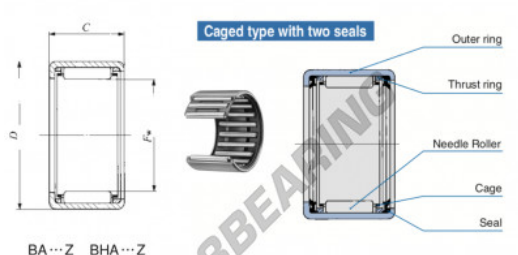

Boundary dimensions mm[inch]		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
P_w	D	C	\bar{D}	ht	Housing bore dia. JT	C	CB	rpm	
	Max.	Max.	Max.	Min.	Max.	Min.	N	N	
50.800 [2]	60.325 [2.4 # 8]	12.700 [500]	2.8				15400	24700	6000

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060601575
Diametro interno	50.8 mm
Diametro interno	2" inch
Diametro esterno	60.325 mm
Diametro esterno	2 3/8" inch
Spessore	12.7 mm
Spessore	1/2" inch
Velocità limite	6000 rpm
Carico dinamico	15.4 kN
Carico statico	24.7 kN
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE