


Gusci a rullini BA348-Z-IKO - BA348-Z-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba348-z-iko>

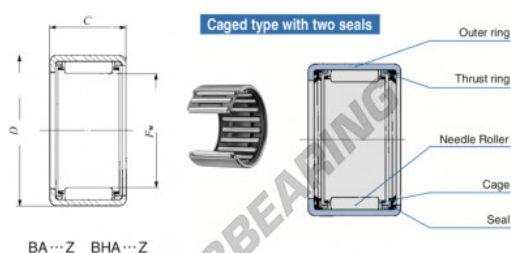

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r)	Assembled inner ring	
F_w	D	C	d_1	d_2	Housing bore dia.	C	C ₀	rpm		
	Max.	Min.	Max.	Min.	Max.	Min.	N	N	open	
53.975 (2 1/8)	63.500 (2 1/2)	12.701 (500)	2.6				16100	26600	5500	—

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060601612
Diametro interno	53.975 mm
Diametro interno	2 1/8" inch
Diametro esterno	63.5 mm
Diametro esterno	2 1/2" inch
Spessore	12.7 mm
Spessore	1/2" inch
Velocità limite	5500 rpm
Carico dinamico	16.1 kN
Carico statico	26.6 kN
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE