


Gusci a rullini BA65-Z-IKO - BA65-Z-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba65-z-iko>

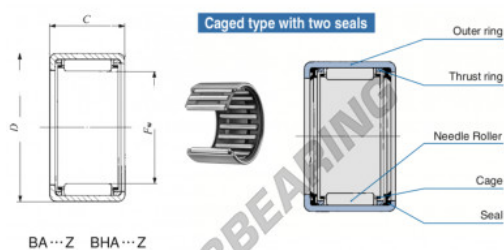

| Boundary dimensions mm(inch) | | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable relative speed ⁽¹⁾ | Assembled inner ring |
|------------------------------|--------------|-------------|---------------------------------|-------|------|------|---------------------------|--------------------------|---|----------------------|
| F_w | D | C | d_2 | h_1 | JT | C | C_0 | | | |
| | | | Max. | Min. | Max. | Min. | N | N | rpm | |
| 0.525 (1/8) | 14.288 (1/2) | 7.92 (3/12) | | | | | 2200 | 2070 | 40000 | — |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | IKO |
| N° Ean13 | 3616060601759 |
| Diametro interno | 9.525 mm |
| Diametro esterno | 14.288 mm |
| Spessore | 7.92 mm |
| Velocità limite | 40000 rpm |
| Carico dinamico | 2.22 kN |
| Carico statico | 2.01 kN |
| Imballaggio | 1 |

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE