


Gusci a rullini BA68-Z-IKO - BA68-Z-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba68-z-iko>

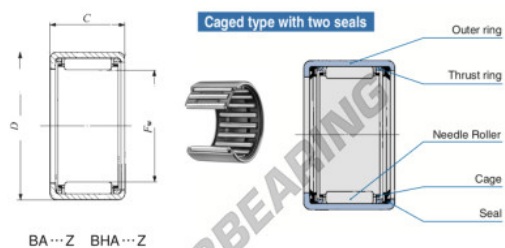

| Boundary dimensions mm(inch) | | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable speed | Assembled inner ring |
|------------------------------|--------------|------------|---------------------------------|-------|-------|--------|---------------------------|--------------------------|-----------------|----------------------|
| F_w | D | C | d_2 | td | d_1 | d_2 | C | C_0 | rpm | inner ring |
| 9.525 (3/8) | 14.288 (1/2) | 12.7 (1/2) | 1 | 9.525 | 9.525 | 14.288 | 14.288 | 4.19 | 4500 | 40000 |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | IKO |
| N° Ean13 | 3616060601773 |
| Diametro interno | 9.525 mm |
| Diametro esterno | 14.288 mm |
| Spessore | 12.7 mm |
| Velocità limite | 40000 rpm |
| Carico dinamico | 4.19 kN |
| Carico statico | 4.56 kN |
| Imballaggio | 1 |

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE