


Gusci a rullini BA1014-Z-IKO - BA1014-Z-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba1014-z-iko>

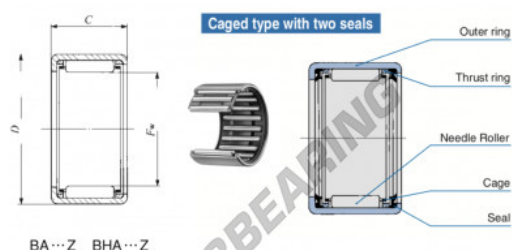

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring	
F_w	D	C	d_1	d_2	J_1	J_2	C	C_0			
			Shaft dia.	Housing bore dia.							
			Min.	Max.	Min.	Max.	Min.	Max.	rpm		
15.875 (5/8)	20.638 (0.812)	22.221 (0.875)	1.3	15.875	15.854	20.650	20.625	10700	17500	25000	RB T14

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060602985
Diametro interno	15.875 mm
Diametro esterno	20.638 mm
Spessore	22.22 mm
Velocità limite	25000 rpm
Peso	100 g
Carico dinamico	10.7 kN
Carico statico	17.5 kN
Imballaggio	-
Standard	Nessuno standard

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE