


## Cuscinetti a sfera fila unica WML6012-2RS-JTEKT - WML6012-2RS-JTEKT

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-sfera/fila-unica/wml6012-2rs-jtekt>

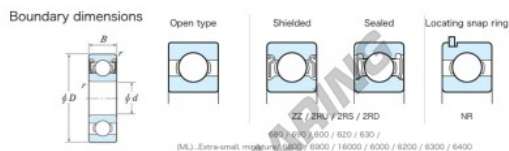

Extra-small standard contact sealed 2RS

| Bearing No. | Boundary dimensions (mm) |    |   | Basic load ratings (kN) |      | Fatigue load limit (kN) | factor | Limiting speeds (min-1) |       |
|-------------|--------------------------|----|---|-------------------------|------|-------------------------|--------|-------------------------|-------|
|             | d                        | D  | B | Cr                      | C0r  | Cu                      | f0     | Grease lub.             |       |
| WML6012 2RS | 6                        | 12 | 4 | 0.1                     | 0.89 | 0.29                    | 8      | 14.5                    | 37000 |

### CARATTERISTICHE DEL PRODOTTO

|                      |                       |
|----------------------|-----------------------|
| Marchio              | JTEKT                 |
| N° Ean13             | 3616060622457         |
| Diametro interno     | 6 mm                  |
| Impermeabilizzazione | Tenuta su ambo i lati |
| Diametro esterno     | 12 mm                 |
| Spessore             | 4 mm                  |
| Velocità limite      | 37000 rpm             |
| Carico dinamico      | 0.89 kN               |
| Carico statico       | 0.29 kN               |
| Imballaggio          | 1                     |

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE