

Teste a snodo TAPR

GIHN-K-110LO-DURBAL - GIHN-K-110LO-DURBAL


<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/tapr/gihn-k-110lo-durbal>

GIHN-K-110LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

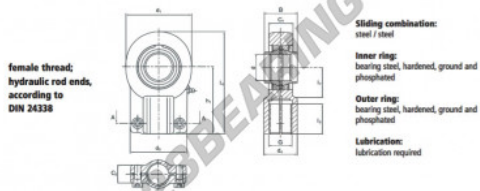

female thread;
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and phosphated
Outer ring:
bearing steel, hardened, ground and phosphated
Lubrication:
lubrication required

order number	d	d ₁	measurement [mm]	G	d ₂	B	C ₁	C ₂
GIHN-K 110 LO	110	235	M 90 x 3	125,0	190	110	88	62

type	l ₁ min	measurement [mm]	l ₂	l ₃	load rating	weight
		h ₁	l ₄	l ₅	C ₀ [kN]	[kg]
GIHN-K / GIHN-KL 110 LO	106	235	364,0	105	1200,0	32,00

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952500522
Diametro interno	110 mm
Diametro esterno	235 mm
Spessore	88 mm
Tipo	TAPR
Peso	32000 g
Il filo	Filetto destro
Lubrificazione	con
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE