


Cuscinetti conico

17886-17830-TIMKEN - 17886-17830-TIMKEN

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rulli/conico/17886-17830-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • TYPE TS

TYPE TS

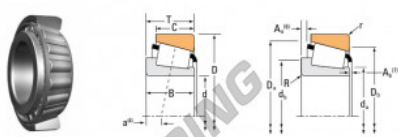

| Bearing Dimensions | | | Load Ratings | | | | | | Part Number | |
|--------------------|--------|---------|---------------------------------------|-------------------------|---------------------------------------|--------------------------------------|-----------------------|-------|-------------|--|
| Bore d | O.D. D | Width B | Dynamic ⁽¹⁾ C ₁ | Factor ⁽²⁾ e | Dynamic ⁽¹⁾ C ₂ | Factor ⁽²⁾ e ₂ | Static C ₃ | Inner | Outer | |
| mm | mm | mm | N | | N | N | N | | | |
| 42.987 | 79.375 | 20.638 | 48900 | 0.37 | 17900 | 11200 | 1.62 | 82200 | 17000 | |
| 1.6924 | 3.1250 | 0.8125 | 15500 | | 4600 | 2510 | | 10700 | 17020 | |

| Bearing Dimensions | | | | | | | | | | Geometry Factors | | | Bearing Weight | |
|--------------------|--------|---------|------|--|--------------------------------------|--|--------------------------------------|-------------------------------|-------------------------------|------------------|----------------|----------------|----------------|------|
| Width | | ER. Dr. | | Shaft | | Housing | | Cage | | G ₁ | G ₂ | C ₃ | | |
| B | C | mm | μm | Max Shaft Fillet Radius R ₁ | Backing Shoulder Dia. d ₁ | Max Housing Fillet Radius r ₁ | Backing Shoulder Dia. D ₁ | A ₁ ⁽¹⁾ | A ₂ ⁽¹⁾ | | | | kg | |
| 20.638 | 15.875 | -3.8 | 1.5 | 40.8 | 51.8 | 2.0 | 75.0 | 71.0 | 1.1 | 1.3 | 25.3 | 17.0 | 0.070 | 0.42 |
| 0.8125 | 0.6250 | -0.15 | 0.06 | 1.93 | 2.01 | 0.08 | 2.95 | 2.80 | 0.04 | 0.06 | | | | 0.94 |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | TIMKEN |
| N° Ean13 | 3663952313641 |
| Diametro interno | 42.987 mm |
| Diametro esterno | 79.375 mm |
| Spessore | 20.638 mm |
| Imballaggio | 1 |

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE