


## Cuscinetti conico 2984A-2924-TIMKEN - 2984A-2924-TIMKEN

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rulli/conico/2984a-2924-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE ROW • TYPE TS

**TYPE TS**

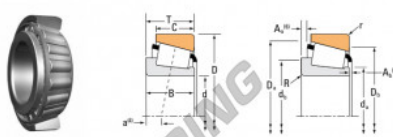

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(3)</sup> C <sub>2</sub>	Factor <sup>(4)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
46.037	85.000	25.400	32300	0.22	14200	14000	1.60	117000	2984A	2924
1.8125	3.3465	1.0000	21000		5400	3225		20000		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage				
Width B	Width C	ER. Dr. α <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(2)</sup>	Backing Shoulder Dia. d <sub>s</sub>	Max Housing Fillet Radius r <sup>(3)</sup>	Backing Shoulder Dia. D <sub>s</sub>	A <sub>1</sub> <sup>(4)</sup>	A <sub>2</sub> <sup>(5)</sup>	A <sub>3</sub> <sup>(6)</sup>	G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	
25.000	25.638	-4.4	0.8	52.0	53.0	1.3	80.0	76.0	1.7	1.1	38.2	15.7	0.0022	0.62
1.0000	0.8125	-0.25	0.03	2.05	2.09	0.05	3.15	2.98	0.07	0.05			1.35	

### CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952314976
Diametro interno	46.037 mm
Diametro interno	1 13/16" inch
Diametro esterno	85 mm
Diametro esterno	3.346" inch
Spessore	25.4 mm
Spessore	1" inch
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE