


Cuscinetti conico 32972-TIMKEN - 32972-TIMKEN

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rulli/conico/32972-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • IsoClass

IsoClass

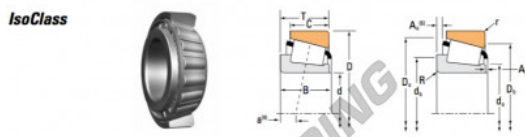

| Bearing Dimensions | | | Load Ratings | | | | | | Part Number | |
|--------------------|-----------|------------|---|----------------------------|---|----------------------------|--------------------------|-------------------------|-------------|--|
| Bore d | O.D. D | Width T | Dynami ⁽¹⁾ C ₁ | Factor ⁽²⁾ e | Dynami ⁽³⁾ C ₂ | Factor ⁽⁴⁾ K | Static C ₀ | Assembly Inner/Outer | | |
| mm | mm | mm | N | | N | | N | | | |
| 360.000 | 480.000 | 76.000 | 1250000 | 4.54 | 324000 | 254000 | 2700000 | | 32972 | |
| 14.1732 | 18.8676 | 2.9921 | 201000 | | 72900 | 57100 | 6240000 | | | |

| Mounting Dimensions | | | | | | | | | | Geometry Factors | | | Bearing Weight | | | |
|---------------------|------------|----------------------------|--|--|--|--|--|-------------------------------|-------------------------------|------------------|----------------|----------------|-------------------|-------|--------|-------|
| Shaft | | | | | Housing | | | | | Cage | | | | | | |
| Width B | Width C | ER Co. a ⁽¹⁾ | Max Shaft Fillet Radius R ⁽²⁾ | Backing Shoulder Dia. d _s | Max Housing Fillet Radius r ⁽³⁾ | Backing Shoulder Dia. D _s | Backing Shoulder Dia. D _s | A ₁ ⁽⁴⁾ | A ₂ ⁽⁵⁾ | G ₁ | G ₂ | C ₃ | | | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | | | | kg | | | |
| 36.000 | 57.000 | 20.0 | 4.0 | 370.0 | 300.0 | 3.0 | 400.0 | 400.0 | 16.0 | 4.0 | | | 294.5 | 244.6 | 0.2061 | 40.22 |
| 2.9921 | 2.2401 | 0.81 | 0.10 | 14.00 | 10.16 | 0.12 | 16.25 | 17.75 | 0.62 | 0.77 | | | | | | 70.80 |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | TIMKEN |
| N° Ean13 | 3663952354231 |
| Diametro interno | 360 mm |
| Diametro esterno | 480 mm |
| Spessore | 76 mm |
| Imballaggio | 1 |

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE