


Cuscinetti conico

EE722115-722186CD-TIMKEN - EE722115-722186CD-TIMKEN

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rulli/conico/ee722115-722186cd-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TDO

TYPE TDO

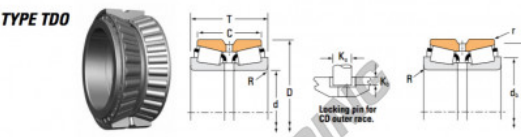

| Bearing Dimensions | | | | Load Ratings | | | | | | | | | |
|--------------------|---------|---------|---------------------------|------------------------|------|-----------------------|----------------|------------------------|-----------------|------------------|-----------------------|---|--|
| Bore d | O.D. D | Width T | Double Outer Ring Width C | Dynamic ⁽¹⁾ | | Static ⁽¹⁾ | | Dynamic ⁽²⁾ | | | Factor ⁽³⁾ | | |
| mm | mm | mm | mm | C ₁₀ | C | Y ₁ | Y ₂ | C ₉₀ | C ₅₀ | C ₁₀₀ | K | K | |
| 292.100 | 469.900 | 200.025 | 140.025 | 261000 | 0.38 | 1.79 | 2.68 | 419000 | 271000 | 729000 | 1.55 | | |
| 11.930 | 18.500 | 7.8750 | 5.6750 | 831000 | | | | 94000 | 63000 | 164000 | | | |

| Part Number | | Dimensions | | | | | | Pin | | Geometry Factors | | | Bearing Weight |
|-------------|----------|---|--------------------------------------|---|--------------------------------------|----------------|----------------|----------------|----------------|------------------|----------------|--------|----------------|
| Inner | Outer | Max. Shaft Fillet Radius R ₁ | Backing Shoulder Dia. d ₂ | Max. Housing Fillet Radius r ₁ | Backing Shoulder Dia. D ₂ | K ₁ | K ₂ | G ₁ | G ₂ | C ₁ | C ₂ | | |
| EE722115 | 722186CD | 0.7 | 330.8 | 1.5 | 432.8 | 28.38 | 11.81 | 1004.4 | 142.6 | 0.1889 | 111.83 | 248.76 | |
| | | 0.38 | 12.99 | 0.06 | 17.04 | 1.13 | 0.47 | | | | | | |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | TIMKEN |
| N° Ean13 | 3663952362700 |
| Diametro interno | 292.1 mm |
| Diametro esterno | 469.9 mm |
| Spessore | 200.025 mm |
| Imballaggio | 1 |

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE