


Cuscinetti a rullini NAF152813-IKO - NAF152813-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/rullini/naf152813-iko>

IKO
NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE
With Inner Ring

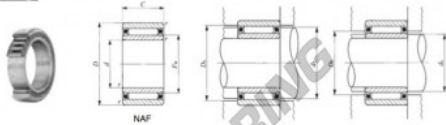

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions, mm					Standard mounting dimensions, mm				
			d	D	C	r_s min ⁽¹⁾	F_w	d_b	D_s Max.	Min.	d_a Max.	D_b
15	NAF 152813	38.5	15	28	13	0.3	20	23.6	28	17	19	20.6
Basic dynamic load rating C	Basic static load rating C_0	Allowable rotational speed ⁽²⁾	Assembled outer ring									
N	N	rpm	LRT 152013									
9 590	13 500	25 000										

Notes:
(1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to grease lubrication.
Remark:
1. The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952384436
Diametro interno	15 mm
Diametro interno	0.591" inch
Diametro esterno	28 mm
Diametro esterno	1.102" inch
Spessore	13 mm
Spessore	0.512" inch
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE