


Snodi sferici GE SB150220120-IKO - SB150220120-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/ge/sb150220120-iko>

IKO
SPHERICAL BUSHINGS
Steel-on-steel Spherical Bushings

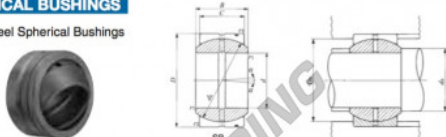

Shaft dia. mm	Identification number	Mass (Ref.) kg	Boundary dimensions mm						Permissible tilting angle degree α	
			d	D	B	C	d_k	r_1 mm ⁽¹⁾		
150	SB 150220120	17.0	150	220	120	105	205	1	5	
Mounting dimensions mm		Dynamic load capacity C_d N	Static load capacity C_s N							
d_s	D_s		Min.	Max. ⁽²⁾	Min.	Max.				
155.5	166	2 110 000	214.5	189	2 110 000	12 700 000				

Notes⁽¹⁾ Minimum allowable value of chamfer dimensions r_1 and r_2 .
⁽²⁾ When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_s .
Remark1: The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2: Not provided with prepacked grease. Perform proper lubrication for use.

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952391632
Diametro interno	150 mm
Diametro esterno	220 mm
Spessore	120 mm
Tipo	GE
Lubrificazione	senza
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE