


## Rotelle con perno CFE16-R-IKO - CFE16-R-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-sfera/rotelle-perno/cfe16-r-iko>

**IKO**  
**CAM FOLLOWERS**

Eccentric Type Cam Followers **With Cage/With Screwdriver Slot**

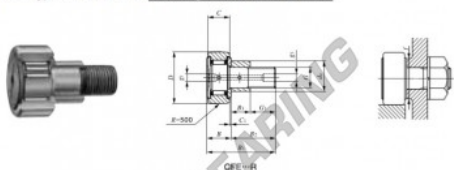

Outside diameter of eccentric roller mm	Identification number				Mass (Ref.)			
	Shield type		Sealed type		Ø	D	C	d <sub>2</sub>
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
22	CFE 16 R				190	35	18	22

Boundary dimensions mm										Mounting dimension f Min, mm	Maximum tightening torque N-m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Maximum allowable static load N
G	B <sub>3</sub>	B <sub>max</sub>	B <sub>1 max</sub>	B <sub>2</sub>	C <sub>1</sub>	G <sub>1</sub>	G <sub>1 max</sub>	Essentiality e	(°) rmax					
M16×1.5	15.5	19.6	52.1	32.5	0.8	6	17	0.6	0.8	26	58.5	12 000	18 300	18 300

### CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060459961
Diametro interno	22 mm
Diametro esterno	35 mm
Spessore	18 mm
Peso	190 g
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE