


Cuscinetti assiali a rullini AZ608517-IKO - AZ608517-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/assiali-rullini/az608517-iko>

IKO
THRUST BEARINGS
Thrust Roller Bearings

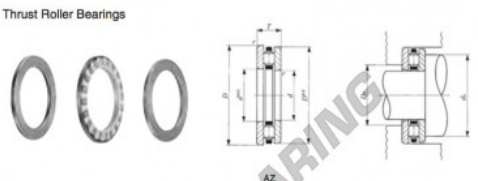

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
60	AZ 608517	345	AZK 60857.5	135	WS 6085	GS 6085	105	

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ^(*)
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d ₁ Min.	d ₁ Max.	N	N	rpm
60	85	17	60.05	84.5	7.5	4.75	1	65	81	81	66	64 600	224 000	4 000

Notes: (*) Minimum allowable value of chamfer dimension r
(1) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060466020
Diametro interno	60 mm
Diametro interno	2.362" inch
Diametro esterno	85 mm
Diametro esterno	3.346" inch
Spessore	17 mm
Spessore	0.669" inch
Peso	345 g
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE