


Cuscinetti assiali a rullini AZ19025548-IKO - AZ19025548-IKO

<https://www.123cuscinetti.ch/cuscinetti-supporti/cuscinetti-rullini/assiali-rullini/az19025548-iko>

IKO

THRUST BEARINGS

Thrust Roller Bearings

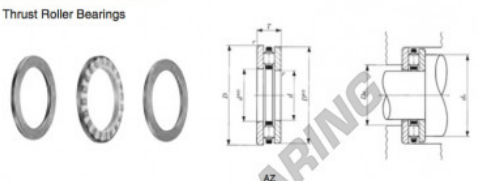

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
190	AZ 19025548	8 060	AZK 19025520	3 100	WS 190255	GS 190255	2 480

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d ₄ Min.	D ₄ Max.	N	N	rpm
190	255	48	190.1	254	20	14	2	205	245	244	206	470 000	2 080 000	1 300

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060466648
Diametro interno	190 mm
Diametro esterno	255 mm
Spessore	48 mm
Peso	8060 g
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE