


## Teste a snodo TAPR GIHL40-DO-DURBAL - GIHL40-DO-DURBAL

<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/tapr/gihl40-do-durbal>

### GIHL40-DO



**Description:** Hydraulic rod end. Made of spherical plain bearing DGE...ES pressed into rod end housing. Sliding combination steel / steel, with grease nipple.

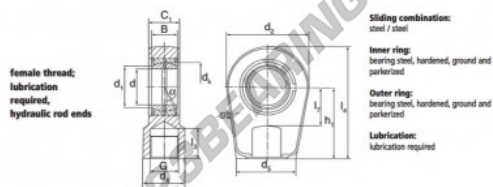

**Sliding combination:**  
steel / steel  
**Inner ring:**  
bearing steel, hardened, ground and polished  
**Outer ring:**  
bearing steel, hardened, ground and polished  
**Lubrication:**  
lubrication required

order number	right hand thread	left hand thread	measurement [mm]									
GIHL 40 DO			d	d <sub>1</sub>	G	d <sub>2</sub>	d <sub>3</sub>	B	C <sub>1</sub>	d <sub>2</sub>		
			40	45,0	M 35 x 1,5	49	76	28	35	94		

type	measurement [mm]					α [°]	load rating C <sub>0</sub> [kN]	weight [kg]
	l <sub>2</sub> min	l <sub>3</sub> min	h	l <sub>4</sub>	d <sub>4</sub>			
GIHR / GIHL 40 DO	36	45	85	135,0	53,0	7	250	2,00

## CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952499673
Diametro interno	40 mm
Diametro esterno	94 mm
Spessore	35 mm
Tipo	TAPR
Peso	2000 g
Il filo	Filetto sinistro
Lubrificazione	con
Imballaggio	1

[contatto@123cuscinetti.ch](mailto:contatto@123cuscinetti.ch)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE