# Teste a snodo SA
# BEM08-20-501-DURBAL - BEM08-20-501-DURBAL

https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/sa/bem08-20-501-durbal

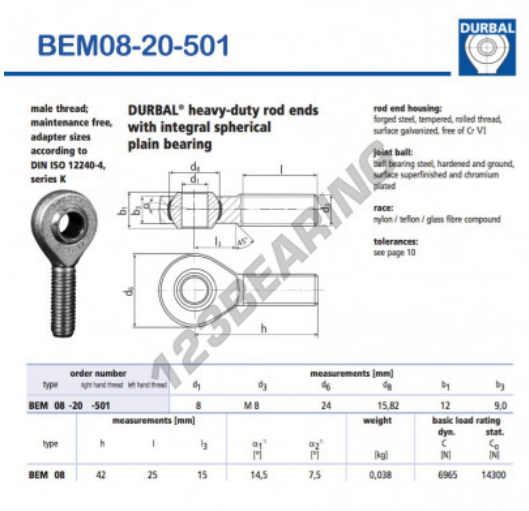

BEM08-20-501

DURBAL

male thread; maintenance free, adapter sizes according to DIN ISO 12240-4, series K

DURBAL® heavy-duty rod ends with integral spherical plain bearing

rod end housing: forged steel, tempered, rolled thread, surface galvanized, free of Cr VI

joint ball: ball bearing steel, hardened and ground, surface superfinished and chromium plated

race: nylon / teflon / glass fibre compound

tolerances: see page 10

| order number type | right hand thread | left hand thread | measurements [mm] $d_1$ | $d_3$ | $d_6$ | $d_8$ | $b_1$ | $b_3$ |
|---|---|---|---|---|---|---|---|---|
| BEM 08 -20 | -501 | | 8 | M 8 | 24 | 15,82 | 12 | 9,0 |

| type | measurements [mm] h | l | $l_3$ | $\alpha_1$° [°] | $\alpha_2$° [°] | weight [kg] | basic load rating dyn. C [N] | stat. $C_0$ [N] |
|---|---|---|---|---|---|---|---|---|
| BEM 08 | 42 | 25 | 15 | 14,5 | 7,5 | 0,038 | 6965 | 14300 |

123BEARING

## CARATTERISTICHE DEL PRODOTTO

| | |
|---|---|
| Marchio | DURBAL |
| N° Ean13 | 3663952507781 |
| Diametro interno | 8 mm |
| Diametro esterno | 24 mm |
| Spessore | 12 mm |
| Tipo | SA |
| Peso | 36 g |
| Il filo | Filetto destro |
| Lubrificazione | senza |
| Imballaggio | - |
| Standard | Nessuno standard |

contatto@123cuscinetti.ch
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE