

Teste a snodo SI

BEF22-20-502-DURBAL - BEF22-20-502-DURBAL

<https://www.123cuscinetti.ch/cuscinetti-supporti/teste-snodo/si/bef22-20-502-durbal>

BEF22-20-502



rod end housing:
forged steel, tempered, surface galvanized, free of Cr VI


joint ball:
ball bearing steel, hardened and ground, surface superfinished and chromium plated

race:
nylon / teflon / glass fibre compound

tolerances:
see page 10

DURBAL® heavy-duty rod ends with integral spherical plain bearing

female thread:
maintenance free, adapter sizes according to DIN ISO 12240-4, series K, thread according to ISO 8139

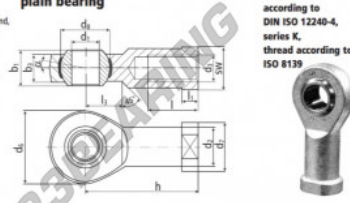

order number		measurements [mm]									
type	spc hard thread	d1	d2	d3	d4	d5	d6	d7	d8	h	l
BEF 22	-20	-502	22	30,0	M 22 x 1,5	54	38	38,05	28	20,0	
measurements [mm]		weight		basic load rating							
type	h	l	l1	l2	l3	SW	α1°	α2°	[kg]	dyn. C [N]	stat. C0 [N]
BEF 22	84	37	12,0	26	32		15,5	10,0	0,520	38230	95600

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952508221
Diametro interno	22 mm
Diametro esterno	54 mm
Spessore	28 mm
Tipo	SI
Peso	520 g
Il filo	Filetto sinistro
Lubrificazione	senza
Imballaggio	1

contatto@123cuscinetti.ch

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE